


How to install sprocket cover for the Daytona 675 or Street Triple/R:




1. Some of you guys might be able to remove the sprocket cover without removing the gear linkage rod. I can't so I remove it this way.
2. Take a photo to note down where your gear selection rod location is for re-assemble time.




3. Pop the sir-clip off before you attempt to remove the gear linkage rod. Push the end over the top of the bar and then slide it down the bar to remove it. There is one at both side of the rod, you might have to loosen the heel guards to get to it properly. Pop the sirclip back in after you pulled it off the ball joint, just in case it decides to wander off.

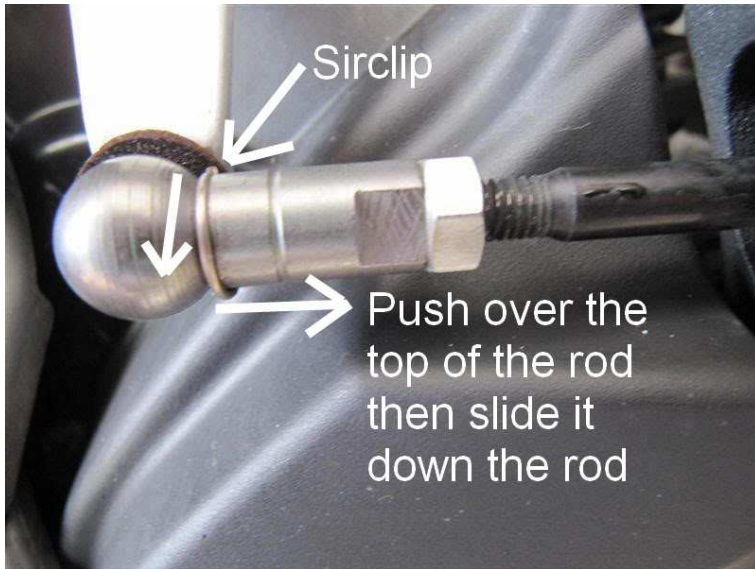

4. Slide the rod out either forward or backwards.

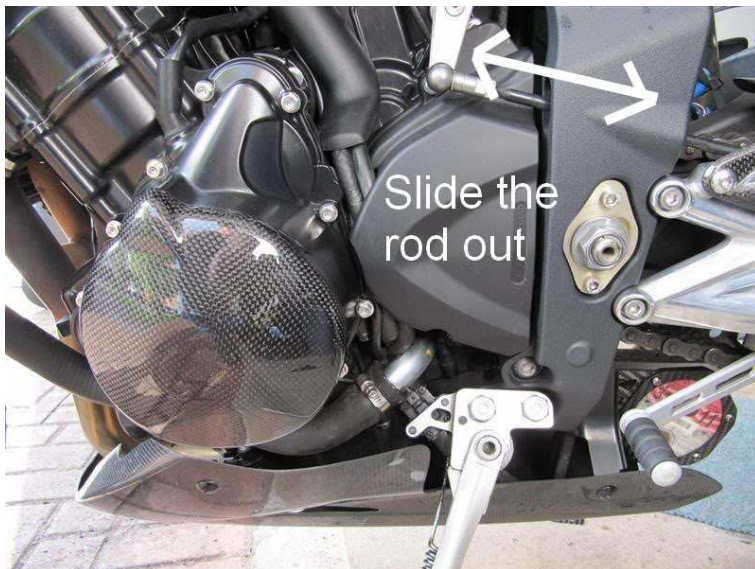

5. Remove the 3 bolts that hold the sprocket cover in place.

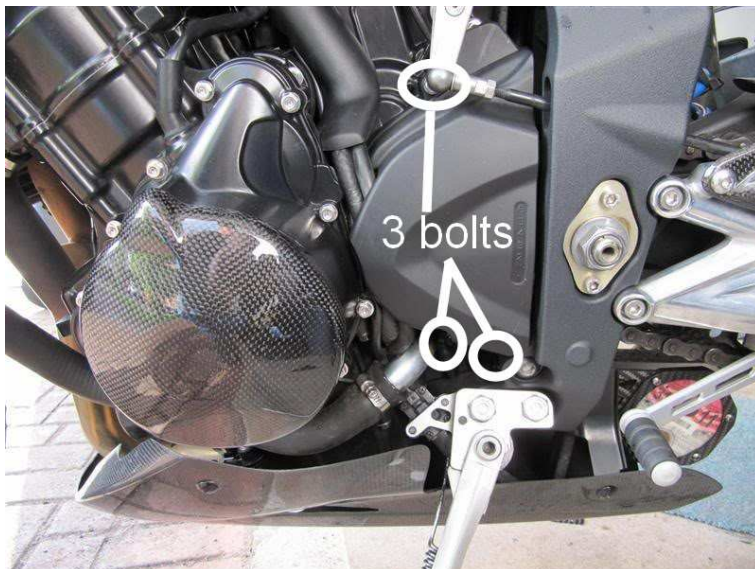

6. When done redo the steps. When you get to the gear linkage rod and ball joint don't tighten it till you have sat on the bike and felt if you gear pedal is in the right location.